

SPECIALTY PRODUCTS / ACCESSORIES



Multi-Grip Couplers & Flanges

This multi size range system is suitable for the restraint connection of all kinds of pipes generally used in the water industry. You can establish corrosion-protected and high quality connections for various kinds of pipes (AC, DI, CI, PE, PVC, Steel).

Available in sizes DN50 - DN300.



DI Compression Fittings

For PE100 and Metric PVC pipes with complete restraint up to 16 bar maximum working pressure. Easy to assemble and dismantle.

Available as flange connections or straight couplers in sizes DN63 - DN355.



Multi-Grip Large Bore Couplers & Flanges

Large bore, wide tolerance repair fittings suitable for most pipe materials. Available in Non or Full restraint options.

Available in sizes DN350 - DN2000 and above. Pressure ratings PN10 - PN16 (higher if required).



Under Pressure Repair Couplers

Repair couplers manufactured with heavy duty seals, allowing for a 'wrap around' repair without shutting down the pipeline. Fittings can be manufactured to cover things such as, EF couplers, rubber ring joints, flanges, etc.

Available in sizes DN300 - DN2000 and pressure rating PN10 - PN100.



DI Saddles - Poly Pipe

Pipe Saddles available with Threaded BSP and Flanged outlets providing a ground breaking innovative solution for PE pipes of all pressure ratings up to PN16. DN40 to DN315 comes in fully ductile banded version.

DN250 to DN600 comes in stainless steel strap version.



Multi-Valve Manifolds

A high quality valve manifold comprising of multiple flanged outlets and integral valves.

The short style provides for space saving installation and lower material, labour, transport and stockholding costs.

Available in 3 and 4 valves configuration. Sizes DN100 - DN200.



Brackets / Fasteners / Clips

A wide range of brackets, clips and fasteners in various materials are available including:

Steel Channel / Cantilever Brackets / Beam Clamps / Plastic Pipe Clips / Double Bolt Clamps / Pipe Saddles / Two Piece Clips / Eye Nuts / Threaded Rod etc.

Fabrication Service Available


JP Piping Systems Pty Ltd is the industry leader in Sales and Service of piping systems, due to unrivalled Product Knowledge, Customer Service and Local Stock Availability. Our clients benefit from the (2) JP Piping System's distributorships (located in both Mackay and the Gold Coast) as they provide expertise, quality products, prompt dispatching and detailed product knowledge.

For prompt, professional and personalised service please contact us.

www.jppipingsystems.com.au | enquiries@jppipingsystems.com.au

MACKAY Telephone: 07 4957 5999

GOLD COAST Telephone: 07 5616 2166

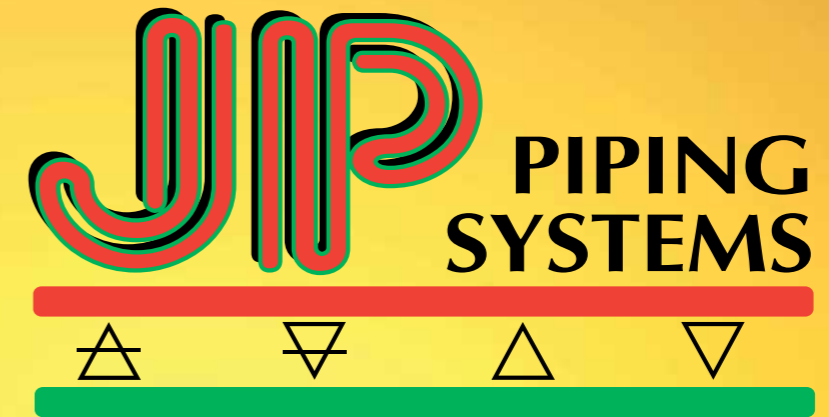

The Industry Specialists


Distributor for



www.jppipingsystems.com.au | enquiries@jppipingsystems.com.au

MACKAY Telephone: 07 4957 5999

GOLD COAST Telephone: 07 5616 2166




PE (Polyethylene)
 Pressure Rating: Up to 25 Bar
 Temp Rating: -50 to +60 Deg C
 Joining Technology:
 Electro Fusion Welding.
 Butt Fusion Welding.
 Mechanical / Compression



Compression Fittings
 Pressure Rating: Up to 16 Bar.
 Size Range: To suit pipes 20mm OD through to 110mm OD




Stainless Steel Press Fit
 Available in Tube or Pipe.
 Tube: 15mm - 168mm OD.
 Pipe: 15mm - 50mm NB
 Temp Range: Up to 200 Deg C.



Stainless Steel
 Pipe and Fittings available for:
 BSP
 NPT
 3000lb
 Butt Weld



Backing / Blind Flanges
 Full range available in Galvanised and Stainless Steel materials
 AS4087 / PN16 (Table D)
 Table E
 ANSI
 DIN PN10 / PN16




Butt Welders / EF Machines
 +GF+ EF Machines are capable of welding up to 1200mm with data logging option available. Capable of welding a variety of brands of fittings.
 Butt Welders available in multiple sizes and configurations.
 Contact us to discuss your requirements




Galv Steel
 Pipe and Fittings available for:
 BSP
 NPT
 3000lb



Roll Groove
 Available in Galvanised or Stainless Steel
 Size: 50 - 250mm
 Complete range of pipes, fittings and valves available.



PVC-U / SCH 80
 Pressure Rating: Up to 16 Bar
 Temp Range: 0 to +60 Deg C
 Joining Technology:
 Solvent Cement
 Main applications:
 Water / Waste Water Treatment
 Marine
 Chemical Process Industry
 Power Plants




PVC-C / SCH 80
 Pressure Rating: Up to 16 Bar
 Temp Range: 0 to +80 Deg C
 Joining Technology:
 Solvent Cement
 Main applications:
 Water / Waste Water Treatment
 Marine
 Chemical Process Industry
 Power Plants



Black Steel
 Pipe and Fittings available for:
 BSP
 NPT
 3000lb
 Butt Weld
 Socket Weld



Stainless Steel Bands
 Available in all sizes up to 1200mm.
 Available in Full Band, BSP Offtake, or Flanged Offtake.



Dual Containment
 Pressure Rating: Up to 16 Bar
 Temp Range: -40 to +140 Deg C
 Joining Technology: Solvent Cement, Electro Fusion Welding, Butt Fusion Welding, Socket Fusion Welding, Infra-Red Welding
 Materials:
 PVC-U, PVC-C, PE100, PP-H, PVDF




PP-H / PVDF
 Pressure Rating: PP to 10 Bar
 PVDF to 16 Bar
 Temp Range: PP 0 to +80 Deg C
 PVDF -20 to +140 Deg C
 Joining Technology: Butt Fusion Welding, Socket Fusion Welding, Infra-Red Welding.
 Main applications:
 Water Treatment
 Chemical Process Industry
 Energy
 Life Science



Bauer Fittings
 Standard HDG
 Heavy Duty HDG
 Hosetails / Spigots



Camlock Fittings
 Aluminium, Nyglass, Polypropylene, Brass, Stainless Steel, Specialty Aluminium.
 Available in sizes: 15mm - 150mm



Plastic Valves
 Ball Valves, Check Valves, Diaphragm Valves, Butterfly Valves, Gate Valves, Pressure Relief Valves, Pressure Reducing Valves, Air Release/Anti-Syphon Valves, Strainers, Pneumatic/Electrically Actuated



Instrumentation
 Flow, Pressure, Temperature, Level, pH / ORP, Conductivity, Turbidity Analysers, Chlorine Analysers.



Flexible Joints
 Available materials include:
 NBR, EPDM, FPM, Teflon Lined.
 Flanges available in HDG, S/S, Black Steel and in various table patterns.



Metal Valves
 Ball Valves, Check Valves, Diaphragm Valves, Butterfly Valves, Gate Valves, Pressure Relief Valves, Pressure Red. Valves, Air Release Valves, Anti-Syphon Valves, Strainers, Pneumatically Actuated Valves, Electrically Actuated Valves.